

Engine	Weichai WP6G125E201
Rated Power	92 kW (125 hp) @ 2,000 rpm
Net Power	85 kW (116 hp) @ 2,000 rpm
Operating Weight	10,075 kg
Standard Bucket Size	1.8 m ³
Standard Breakout Force	99 kN
Standard Dump Clearance	2,930 mm

835H

WHEEL LOADER

 **LIUGONG**



TOUGH WORLD. TOUGH EQUIPMENT.

835H SPECIFICATIONS >>>

ENGINE

Emission Regulation	Tier 2 / Stage II
Maker	Weichai
Model	WP6G125E201
Gross Power	92 kW (125 hp) @ 2,000 rpm
Net Power	85 kW (116 hp) @ 2,000 rpm
Peak Torque	540 N·m @ 1,300~1,500 rpm
Displacement	6.75 L
Number of Cylinder	6
Aspiration	Turbocharged

TRANSMISSION

Transmission Type	Planetary, power shift
Torque Converter	Double stage, four elements
Maximum Travel Speed, fwd	37 km/h
Maximum Travel Speed, rev	16 km/h
Number of Speed, fwd	2
Number of Speed, Rev	1

AXLES

Differential Front Type	Conventional
Differential Rear Type	Conventional
Axle Oscillation	±10°

STEERING


Steering Configuration	Articulated
Steering Relief Pressure	17.2 MPa

BRAKES

Service Brake Type	Caliper discs brake
Service Brake Actuation	Air over hydraulic
Parking Brake Type	Mechanical control
Parking Brake Actuation	Mechanical

HYDRAULIC SYSTEM

Main Pump Type	Gear
Main Relief Pressure	17 MPa
Raise	5.5 s
Dump Time	1.1 s
Float Down Time	3.1 s
Fastest Total Cycle Time	9.7 s

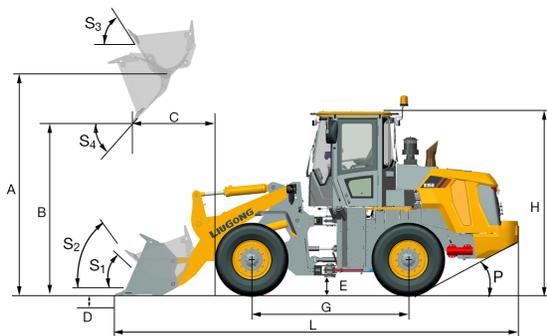

LOADER ARM PERFORMANCE with Quick Attach Bucket 1.8 m³

Tipping Load - Straight (ISO 14397-1:2007)	7,800 kg
Tipping Load - Full Turn (ISO 14397-1:2007)	6,700 kg
Bucket Breakout Force	99 kN
A Maximum Hinge Pin Height	3,738 mm
B Dump Clearance at Full Height Discharge	2,930 mm
C Dump Reach at Full Height Discharge	1,035 mm
D Maximum Digging Depth, Bucket Level	40 mm
S ₁ Rollback at Ground Level	42°
S ₂ Bucket Rollback at Carry	49°
S ₃ Bucket Rollback at Maximum Height	60°
S ₄ Maximum Dump Angle at Full Height	45°

BUCKET PERFORMANCE

Reference Bucket	1.5 - 2.3 m³
------------------	--------------

DIMENSIONS

E Ground Clearance	350 mm
G Wheelbase	2,870 mm
H Cab Height	3,340 mm
J Wheel Tread	1,850 mm
K Width Over Tires	2,295 mm
L Length with Bucket Down	7,150 mm
M Turn Angle, Either Side	40°
P Rear Angle of Departure	28°
R ₁ Turning Radius, Bucket Carry	5,660 mm
R ₂ Turning Radius, Outside of Tire	5,090 mm
W Width Over Bucket	2,460 mm

TIRES


Tire Size	17.5 - 25
-----------	-----------

OPERATING WEIGHTS

Operating Weight	10,075 kg
------------------	-----------

SERVICE CAPACITY

Fuel Tank	140 L
Engine Oil	18 L
Cooling System	40 L
Hydraulic System	140 L
Transmission and Torque Converter	40 L
Axles, Each	22 L

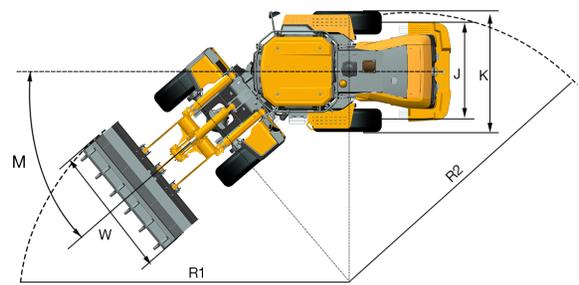

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China
T: +86 772 3886124 E: overseas@liugong.com
www.liugong.com

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. Liugong standard and optional equipment may vary from region to region. Please consult your Liugong dealer for information specific to your area. Engine power kW is converted to metric hp in this file (1 kW=1.36 hp).

12/2019 Designed by Liugong