

Machine Rating

Rated operating capacity (ISO 14397-1)	869 kg
Tipping load (ISO 14397-1):	1737 kg
Pump capacity	64.70 L/min
Pump capacity (with high flow option)	101.10 L/min
System relief at quick couplers	23.8-24.5 MPa
Max. travel speed (high range - option)	17.3 km/h
Max. travel speed (low range)	11.8 km/h

Engine

Make / Model	Kubota / V2203-M-DI-E2B-BC-3
Fuel	Diesel
Cooling	Liquid
Power at 2800 RPM (SAE J1995):	36.4 kW
Torque at 1425 RPM (SAE J1 995 Gross)	150.0 Nm
Number of cylinders	4
Displacement	2196 cm ³
Fuel tank	93.70 L

Weights

Operating weight	2815 kg
Shipping weight	2476 kg

Controls

Vehicle steering	Direction and speed controlled by two hand levers or optional Advanced Control System (ACS), Advanced Hand Controls (AHC) or Selectable Joystick Controls (SJC)
------------------	---

Loader hydraulics tilt and lift	Separate foot pedals or optional Advanced Control System (ACS), Advanced Hand Controls (AHC) or Selectable Joystick Controls (SJC)
---------------------------------	--

Front auxiliary (standard)	Electrical switch on right-hand steering lever
----------------------------	--

Drive System

Transmission	Infinitely variable tandem hydrostatic piston pumps, driving two fully reversing hydrostatic motors
--------------	---

Standard Features


Cushion suspension seat	Lift arm support
Automatically activated glow plugs	Noise reduction kit
Auxiliary hydraulics: variable flow/maximum flow	Work lights, front and rear
Bob-Tach™ frame	Parking brake
Bobcat Interlock Control System (BICS)	Seat belt
Deluxe operator cab* Includes interior cab foam, side, top and rear windows, Deluxe wire harness, dome light, and electrical power port, cup holder, storage place, horn ¹	Seat bar
Electrically activated proportional front auxiliary hydraulics	Spark arrestor muffler
Engine/hydraulics system shutdown	10 x 16.5, 10-ply, Heavy duty tyres
Hydraulic bucket positioning (including ON/OFF switch)	CE certification
Instrumentation	Warranty: 12 months or 2000 hours (whichever occurs first)

1. Roll Over Protective Structure (ROPS) - meets requirements of SAE-J1040 and ISO 3471; Falling Object Protective Structure (FOPS) - meets requirements of SAE-J1043 and ISO 3449, Level I

Options

High-Flow hydraulics	Selectable Joystick Controls (SJC)
Deluxe instrument panel	Two speed
Power Bob-Tach™	Air ride seat with 2 point seat belt
Cab enclosure with heating	Back-up alarm
10 x 16.5, 10-ply, Heavy duty tyres, offset rims	Beacon
10 x 16.5, 10-ply, Severe duty tyres	Engine block heater
12 x 16.5, 12-ply, Severe duty tyres, poly filled	Fire extinguisher
12 x 16.5, Solid flex tyres	Radio
31 x 12-16.5, 10-ply, Superflotation tyres	Road kit
Advanced Control System (ACS)	Stroke
Advanced Hand Controls (AHC)	

Dimensions

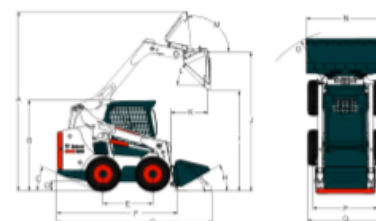

(A)	3901.0 mm	(J)	3023.0 mm
(B)	1972.0 mm	(K)	828.0 mm
(C)	24°	(L)	42°
(D)	185.0 mm	(M)	97°
(E)	1082.0 mm	(N)	1727.0 mm
(F)	2657.0 mm	(O)	2024.0 mm
(G)	3378.0 mm	(P)	1374.0 mm
(H)	30°	(Q)	1643.0 mm
(I)	2319.0 mm		

Attachments

Angle Brooms	Pallet Forks, Hydraulic
Augers	Pallet Forks, Standard
Backhoes	Planers
Bale Forks	Root Grapples
Box Blades	Rotary Cutters
Breakers	Scarifiers
Brush Saws	Scrapers
Bucket Adapters	Skeleton Buckets
Chippers	Snow & Light Material Buckets
Combination Buckets	Snow Blades
Concrete Mixers	Snowblowers
Construction / Industrial Buckets	Snow Pushers
Cutter Crushers	Snow V-Blades
Diggers	Sod Layers
Dozer Blades	Soil Conditioners
Dumping Hoppers	Spreaders
Feeding Buckets	Stabilizers
Fertilizer Buckets	Stump Grinders
Flail Cutters	Sweepers
General Purpose Buckets	Tillers
Graders	Tilt-Tatch
Grapples, Farm - Utility	Tracks
Grapples, Industrial	Tree Transplanters
Landplanes	Trench Compactors
Landscape Rakes	Trenchers
Low Profile Buckets	Utility Frames
Miscellaneous	Vibratory Rollers
Mixing Buckets	Water Kits
Mowers	Wheel Saws
Packer Wheels	Whisker Brooms
Pallet Fork Accessories	